


Dimensions

Symbol	Value (mm)
'A'	24.77-26.03
'B'	9.40-9.65
'C'	6.07-6.47
'D'	6.30-6.68
'E'	19.05-20.07
'F'	6.07-6.47
'G'	18.80-19.30

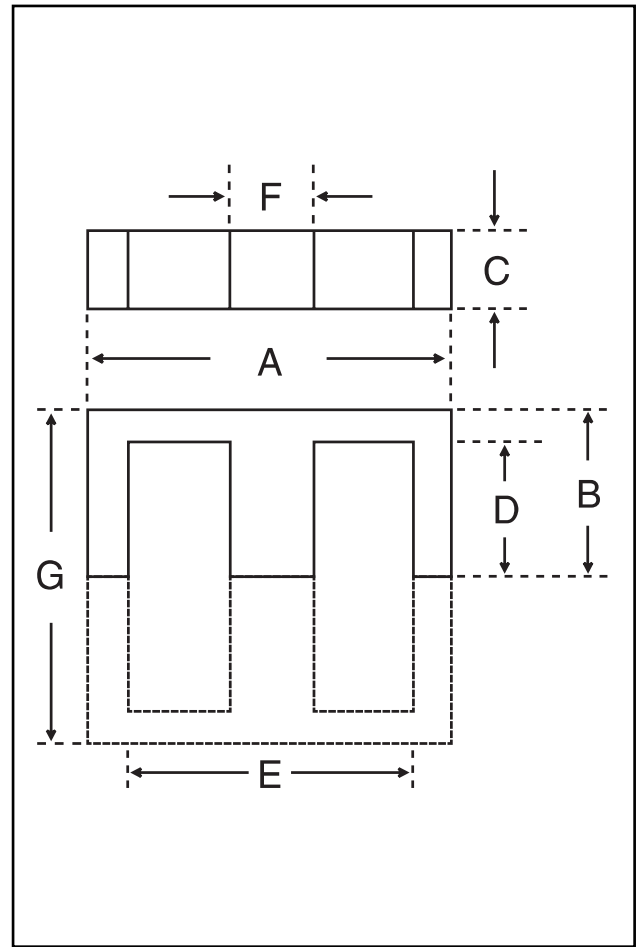

Effective Geometric Parameters

Parameter	Symbol	Value	Unit
$\Sigma(l/A)$	C_1	1.28	mm^{-1}
effective magnetic path length	l_e	48.70	mm
effective area of magnetic path	A_e	38.10	mm^2
minimum area of magnetic path	A_{min}	38.40	mm^2
effective volume	V_e	1860	mm^3

Electrical Specification

Grade	A_L Value	Tolerance on A_L (%)	Gap Length (mm)	Eff. Permeability	Part No.
F6	1130	min	-	1150	32-030-26
F44	1480	+30/-20	-	1510	32-030-44
F9	2740	+30/-20	-	2790	32-030-36

Parameter	Symbol	Freq. kHz	Flux Density	Component
				32-030-44
Effective total core loss (W) (maximum)	P_v	16	200mT	-
		25	200mT	0.242
		100	100mT	0.298

