


Dimensions

Symbol	Value (mm)
'A'	33.26-35.02
'B'	13.05-13.16
'C'	7.63-8.12
'D'	8.28-8.78
'E'	23.86-25.32
'F'	10.81-11.45
'G'	26.10-26.32

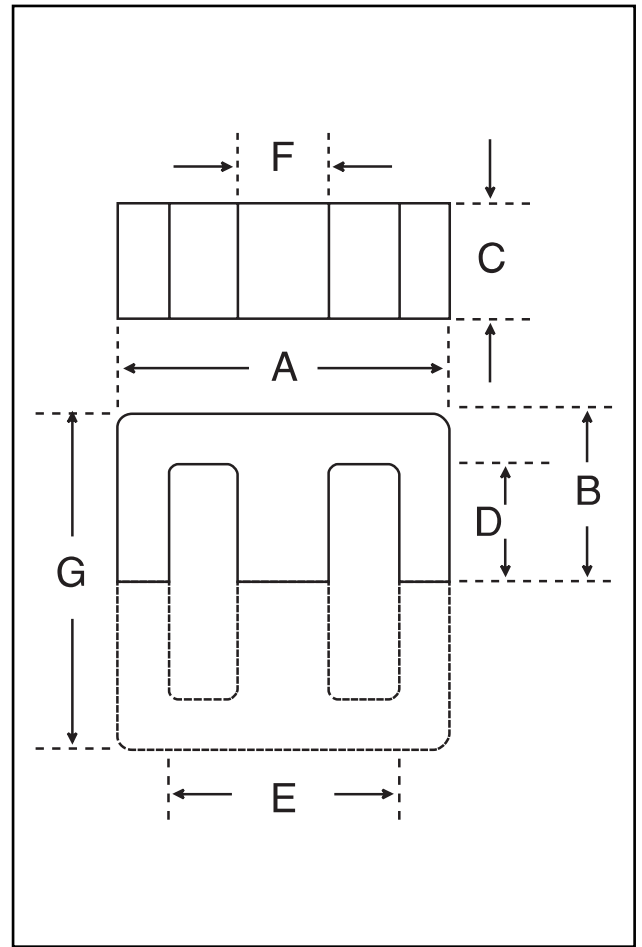

Effective Geometric Parameters

Parameter	Symbol	Value	Unit
$\Sigma(l/A)$	C_1	0.808	mm^{-1}
effective magnetic path length	l_e	62.50	mm
effective area of magnetic path	A_e	77.40	mm^2
minimum area of magnetic path	A_{min}	-	mm^2
effective volume	V_e	4840	mm^3

Electrical Specification

Grade	A_L Value	Tolerance on A_L (%)	Gap Length (mm)	Eff. Permeability	Part No.
F6	1790	min	-	1150 min	32-010-26

Parameter	Symbol	Freq. kHz	Flux Density	Component
				32-010-26
Effective total core loss (W) 25°C (maximum)	P_v	16	200mT	0.726
		16	200mT	0.726

