


Dimensions

Symbol	Value (mm)
'A'	15.50-16.70
'B'	7.90-8.20
'C'	4.30-4.70
'D'	5.70-6.10
'E'	11.30-11.90
'F'	4.30-4.70
'G'	15.80-16.40

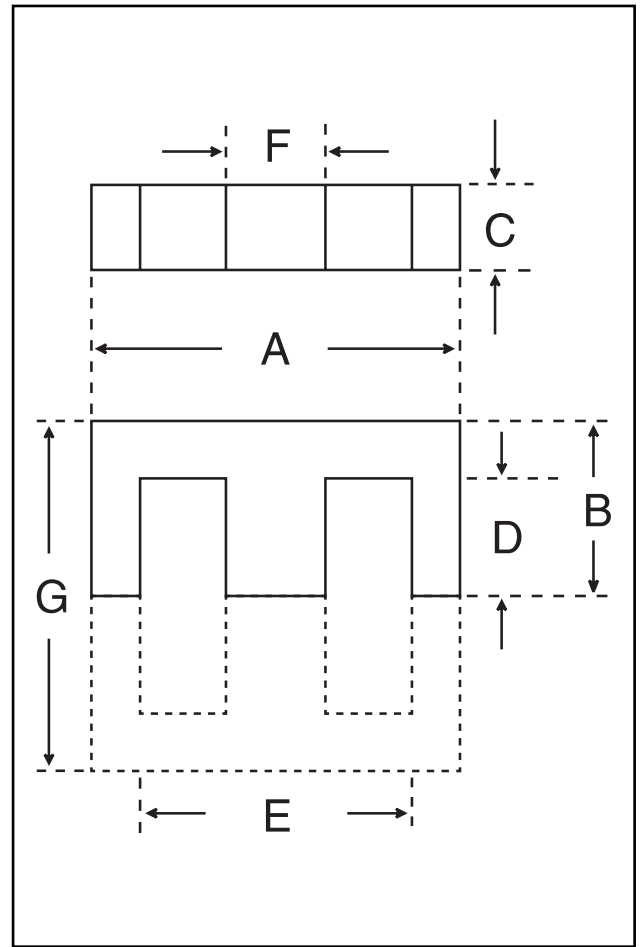

Effective Geometric Parameters

Parameter	Symbol	Value	Unit
$\Sigma(l/A)$	C_1	1.87	mm^{-1}
effective magnetic path length	l_e	37.60	mm
effective area of magnetic path	A_e	20.10	mm^2
minimum area of magnetic path	A_{min}	19.40	mm^2
effective volume	V_e	754	mm^3

Electrical Specification

Grade	A_L Value	Tolerance on A_L (%)	Gap Length (mm)	Eff. Permeability	Part No.
F44	960	+30/-20	-	1428	32-370-44

