


Dimensions

Symbol	Value (mm)
'A'	24.30-25.40
'B'	12.30-12.80
'C'	6.90-7.50
'D'	8.70-9.20
'E'	17.50-18.30
'F'	7.00-7.50
'G'	24.60-25.60

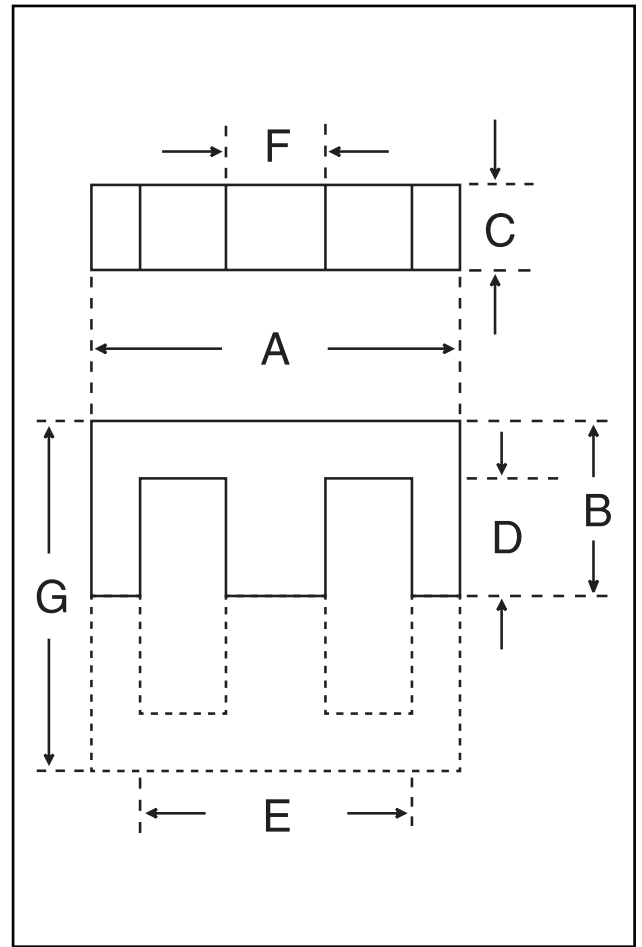

Effective Geometric Parameters

Parameter	Symbol	Value	Unit
$\Sigma(l/A)$	C_1	1.09	mm^{-1}
effective magnetic path length	l_e	57.50	mm
effective area of magnetic path	A_e	52.50	mm^2
minimum area of magnetic path	A_{min}	51.50	mm^2
effective volume	V_e	3020	mm^3

Electrical Specification

Grade	A_L Value	Tolerance on A_L (%)	Gap Length (mm)	Eff. Permeability	Part No.
F5	1750	+30/-20	-	1520	32-190-25
F48	1900	+30/-20	-	1648	32-190-48
F9	3100	+30/-20	-	2690	32-190-36
F5	≈ 155	-	0.50	≈ 135	32-191-25

