


Dimensions

Symbol	Value (mm)
'A'	11.20-11.80
'B'	1.75-1.95
'C'	7.45-7.85
'D'	7.20-7.60
'E'	9.20-9.60
'F'	3.15-3.45
'G'	10.20-10.40

Effective Geometric Parameters

Parameter	Symbol	Value	Unit
$\Sigma(l/A)$	C_1	1.70	mm^{-1}
effective magnetic path length	l_e	19.20	mm
effective area of magnetic path	A_e	11.30	mm^2
minimum area of magnetic path	A_{min}	8.50	mm^2
effective volume	V_e	217	mm^3

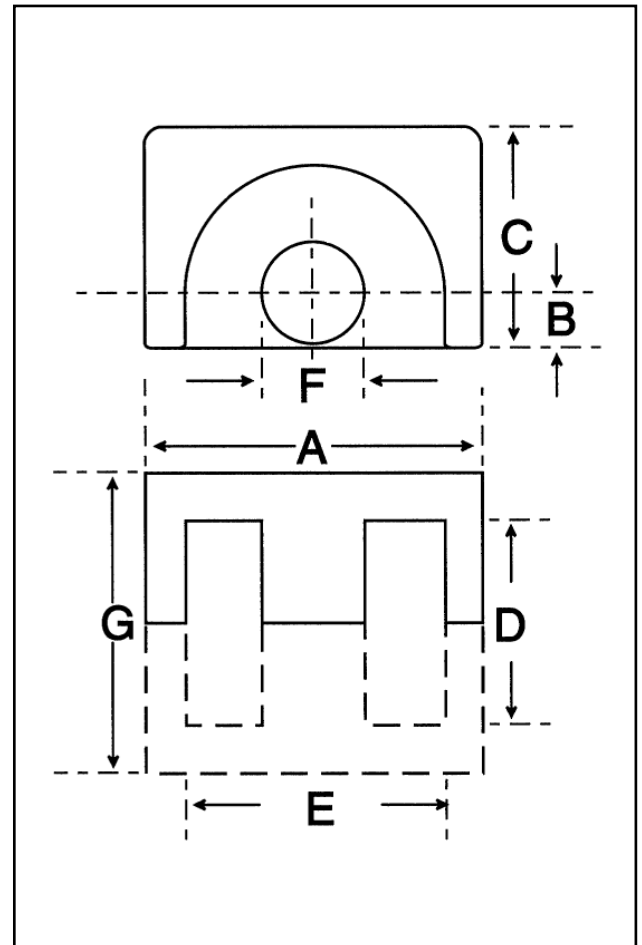

Electrical Specification

Grade	A_L Value	Tolerance on A_L (%)	Gap Length (mm)	Eff. Permeability	Part No.
F39	4800	+40/-30	-	6495	32-820-39

