


Dimensions

Symbol	Value (mm)
'A'	17.50-18.50
'B'	3.05-3.45
'C'	10.75-11.25
'D'	11.20-11.80
'E'	11.50-12.50
'F'	5.50-5.85
'G'	16.60-17.00

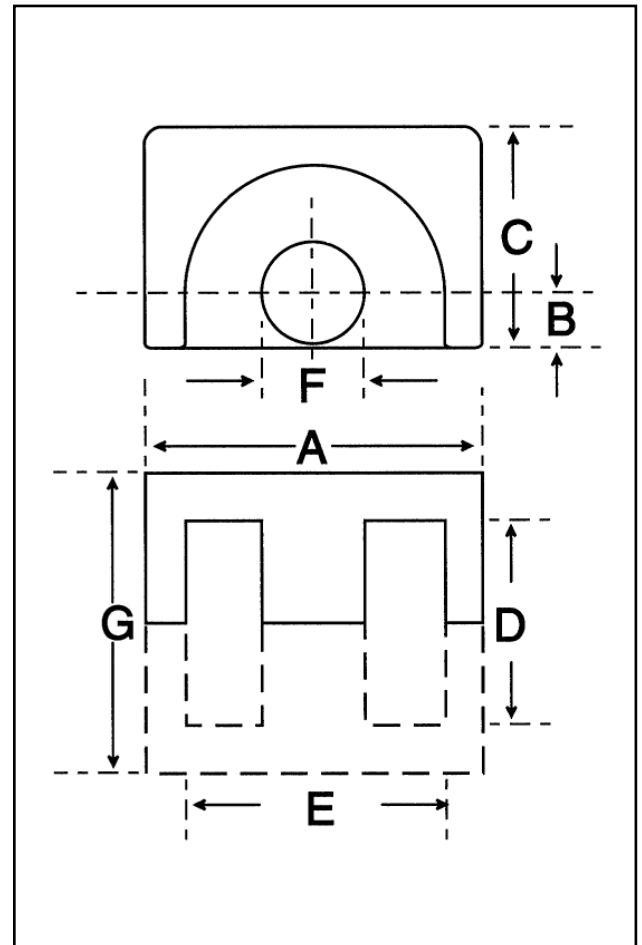

Effective Geometric Parameters

Parameter	Symbol	Value	Unit
$\Sigma(l/A)$	C_1	0.84	mm^{-1}
effective magnetic path length	l_e	28.50	mm
effective area of magnetic path	A_e	33.90	mm^2
minimum area of magnetic path	A_{min}	25.50	mm^2
effective volume	V_e	966	mm^3

Electrical Specification

Grade	A_L Value	Tolerance on A_L (%)	Gap Length (mm)	Eff. Permeability	Part No.
F44	2130	+30/-20	-	1425	32-830-44
F39	11400	+40/-30	-	7620	32-830-39

