

Parameter	Symbol	Standard Conditions of test		Unit	F5
Initial Permeability (nominal)	μ_i	B<0.1mT 10kHz	25°C	-	2000 ± 20%
Saturation Flux Density (typical)	B_{sat}	H=796 A/m = 10Oe	25°C 100°C	mT	470 350
Remanent Flux Density (typical)	B_r	H→0 (from near Saturation) 10kHz	25°C	mT	200
Coercivity (typical)	H_c	B→0 (from near Saturation) 10kHz	25°C	A/m	21
Curie Temperature (minimum)	Θ_c	B<0.1mT	10kHz	°C	200
Resistivity (typical)	ρ		1 V/cm 25°C	ohm-cm	100
Amplitude Permeability (minimum)	μ_a	400mT 340mT	25°C 100°C	-	2400 1825
Total Power Loss Density (max)	P_v	200mT;16kHz 200mT;16kHz 200mT;16kHz 200mT;16kHz 200mT;16kHz	25 ° 60 ° 100 ° 60 ° 100 °	mW/ cm ³	120 110 110 190 190

Material type: Manganese-Zinc Ferrite


Properties: - Losses are minimised in the 60°-100°C range
- High saturation

Frequency range: Up to 150/200 kHz (depending on flux density)


Typical applications: Designed for high-flux power applications; power supplies and EHT transformers.

Typical core shapes: E, U, ETD, and RM cores.


Complex Permeability vs. Frequency

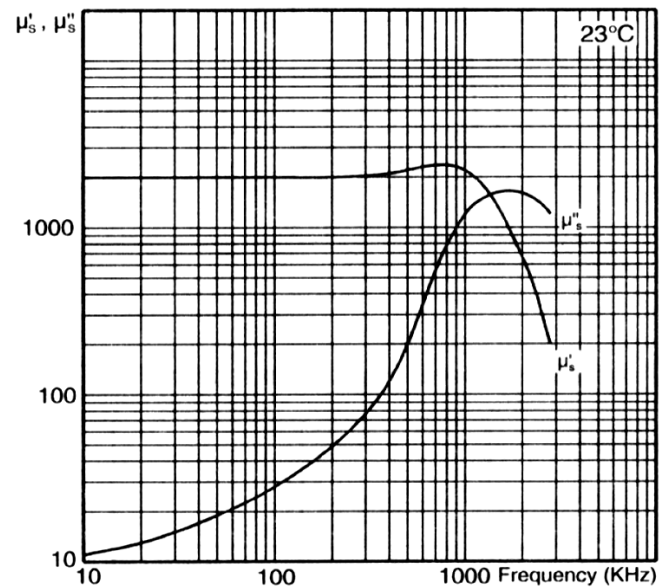


Initial Permeability vs. Temperature

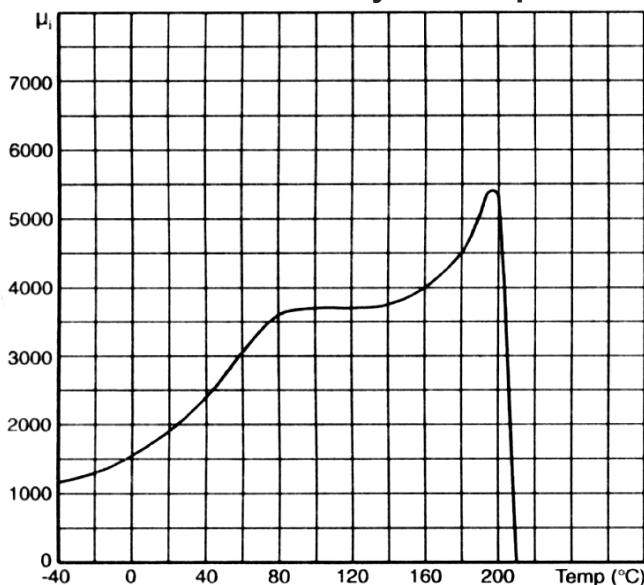


Relative Loss Factor vs. Frequency

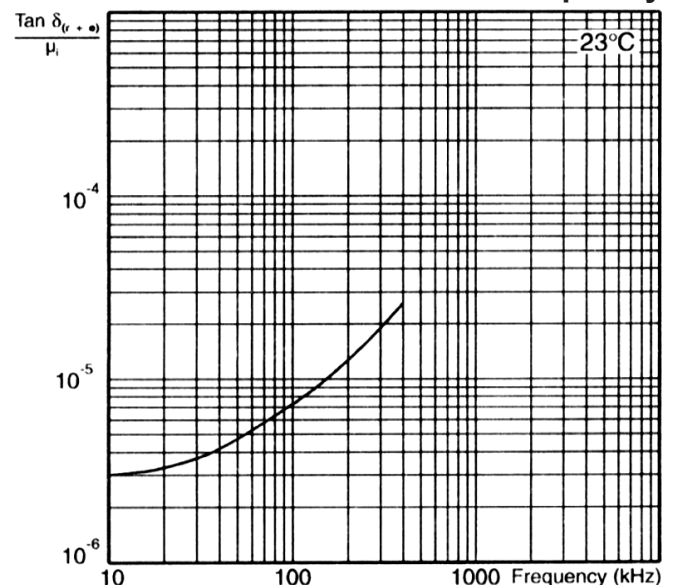


Dynamic Magnetisation: Typical B-H Loops

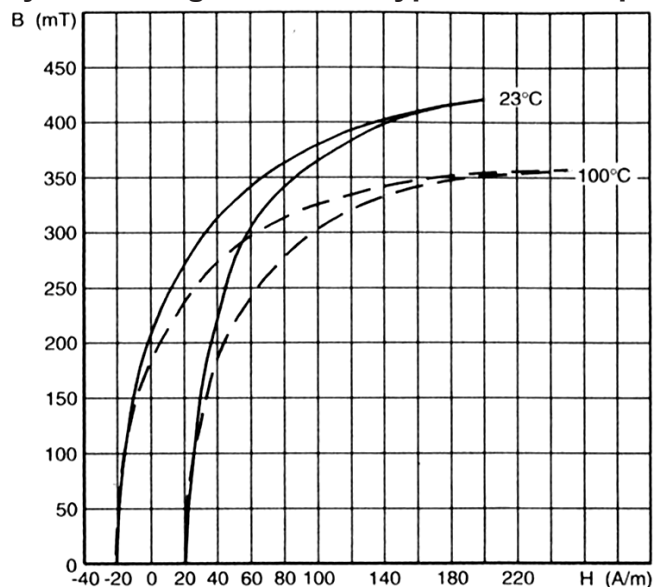

Static Magnetisation: Permeability vs. B

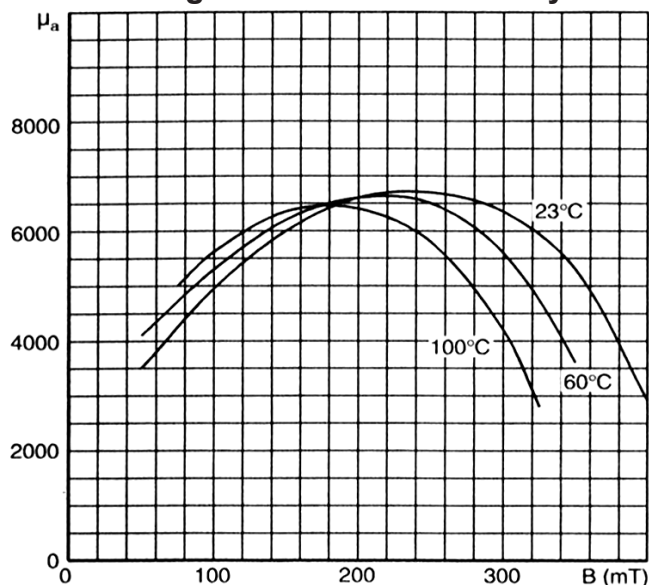

Power Loss Density vs. Temperature

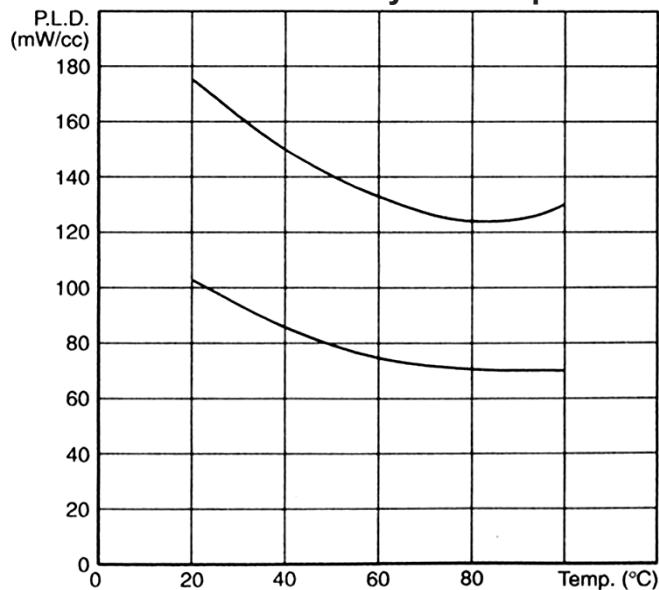

Power Loss Density vs. Frequency

