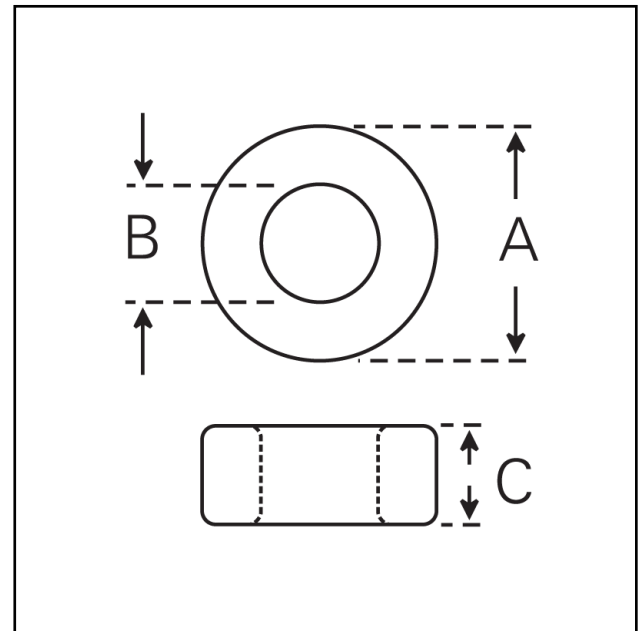


Dimensions

Symbol	Value (mm)	±
'A'	38.10	1.52
'B'	25.40	1.02
'C'	15.87	0.476

Effective Geometric Parameters

Parameter	Symbol	Value	Unit
$\Sigma(l/A)$	C_1	0.976	mm ⁻¹
effective magnetic path length	l_e	97.06	mm
effective area of magnetic path	A_e	99.40	mm ²
effective volume	V_e	9648	mm ³

Electrical Specification

Grade	A_L	Tolerance on A_L (%)	Coating	μ_i	Part No.
F16	161	+30/-20	No Coating	≈125	28-044-32
F44	2445	+30/-20	Epoxy	≈1900	28-744-44
F9C	6435	+30/-20	Epoxy	≈5000	28-744-C36

Please note all dimensions are nominal and given for uncoated cores.

Coating Characteristics

Dielectric breakdown strength and approximate thickness per surface for coated cores is as follows:

Epoxy 1000V dc for cores up to 10mm outside diameter
 1500V dc for cores >10mm and ≤20mm outside diameter
 2000V dc for cores >20mm outside diameter
 Coating thickness is approximately 0.25mm

Enamel Cores are coated for identification purposes only.
 They can be either fully or partially coated and no breakdown strength can be guaranteed.
 Coating thickness is approximately 0.25mm