


Dimensions

Symbol	Value (mm)
'A'	10.90-11.30
'B'	6.40-6.60
'C'	9.00-9.40
'D'	4.50-4.70
'E'	2.00-2.10
'F'	4.40-4.70
'G'	6.50-6.95
'H'	2.65-3.05

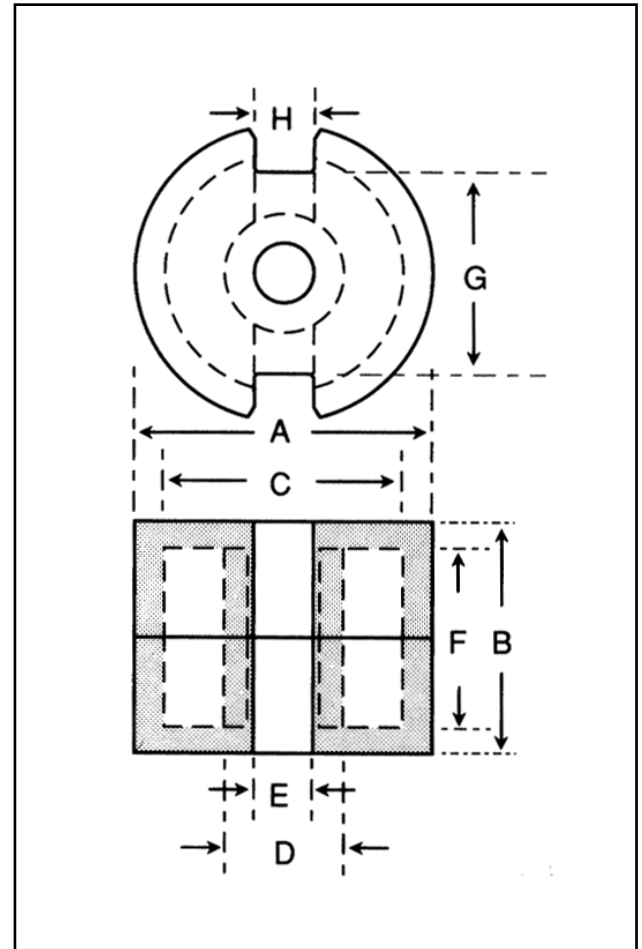

Effective Geometric Parameters

Parameter	Symbol	Value	Unit
$\Sigma(l/A)$	C_1	1.00	mm^{-1}
effective magnetic path length	l_e	15.90	mm
effective area of magnetic path	A_e	15.90	mm^2
effective volume	V_e	252	mm^3

Electrical Specification

Grade	A_L	Tolerance on A_L (%)	Gap Length (mm)	Eff. Permeability	Part No.
P11	1600	+30/-20	-	≈ 1273	29-400-41

