


Dimensions

Symbol	Value (mm)
'A'	13.80-14.30
'B'	8.20-8.50
'C'	11.60-12.00
'D'	5.80-6.00
'E'	3.00-3.10
'F'	5.60-6.00
'G'	8.70-9.20
'H'	3.60-4.10

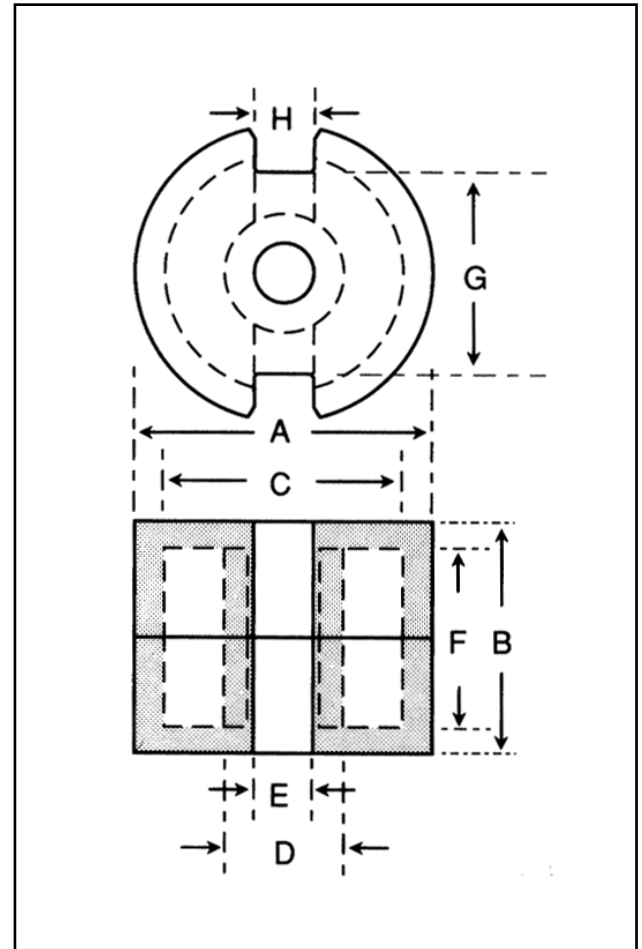

Effective Geometric Parameters

Parameter	Symbol	Value	Unit
$\Sigma(l/A)$	C_1	0.789	mm ⁻¹
effective magnetic path length	l_e	19.80	mm
effective area of magnetic path	A_e	25.10	mm ²
effective volume	V_e	495	mm ³

Electrical Specification

Grade	A_L	Tolerance on A_L (%)	Gap Length (mm)	Eff. Permeability	Part No.
P11	2300	+30/-20	-	≈1444	29-450-41
P11	740	±5	≈0.04	≈465	29-4581-41*

*Part number refers to a pair of cores

