


Dimensions

Symbol	Value (mm)
'A'	17.60-18.40
'B'	10.40-10.70
'C'	14.90-15.40
'D'	7.30-7.60
'E'	3.00-3.20
'F'	7.20-7.60
'G'	11.30-12.30
'H'	3.90-4.40

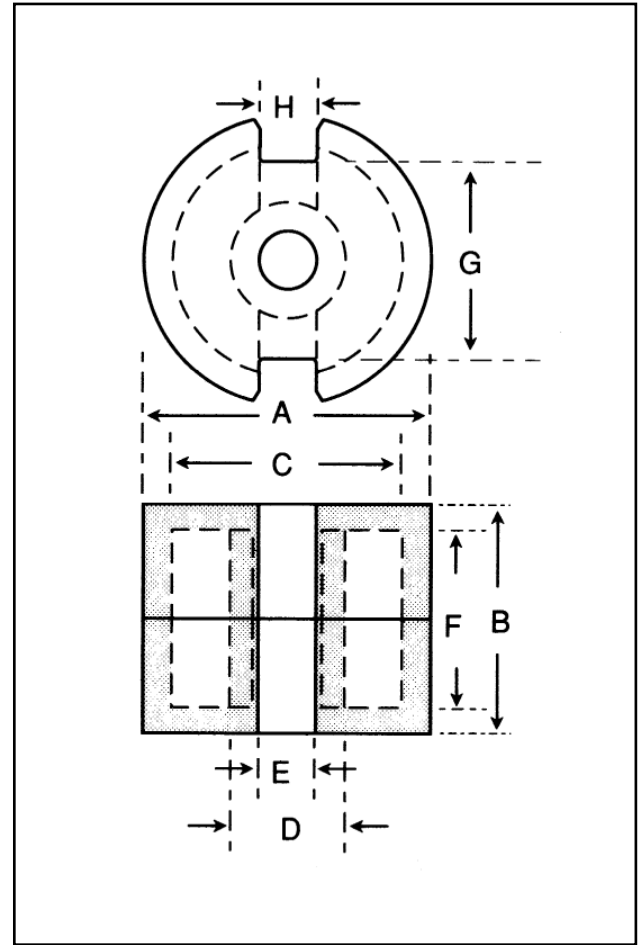

Effective Geometric Parameters

Parameter	Symbol	Value	Unit
$\Sigma(l/A)$	C_1	0.597	mm ⁻¹
effective magnetic path length	l_e	25.80	mm
effective area of magnetic path	A_e	43.30	mm ²
effective volume	V_e	1120	mm ³

Electrical Specification

Grade	A_L	Tolerance on A_L (%)	Gap Length (mm)	Eff. Permeability	Part No.
P11	3100	+30/-20	-	≈1473	29-500-41
F9	5500	+30/-20	-	≈2613	29-500-36

