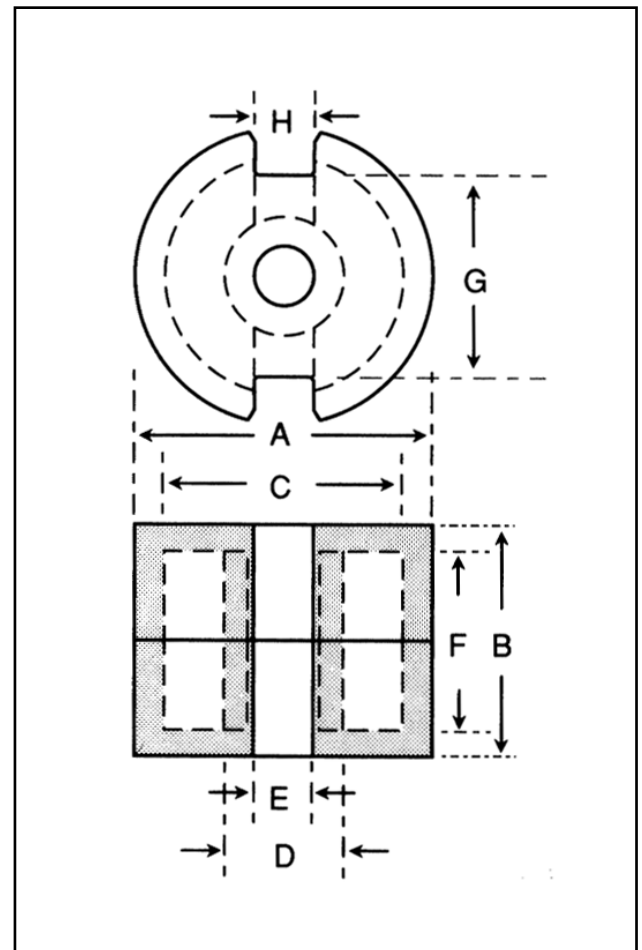


Dimensions

Symbol	Value (mm)
'A'	21.20-22.00
'B'	13.20-13.60
'C'	17.90-18.50
'D'	9.10-9.40
'E'	4.40-4.60
'F'	9.20-9.60
'G'	13.30-13.90
'H'	3.90-4.50

Effective Geometric Parameters

Parameter	Symbol	Value	Unit
$\Sigma(l/A)$	$C_1$	0.497	mm <sup>-1</sup>
effective magnetic path length	$l_e$	31.50	mm
effective area of magnetic path	$A_e$	63.40	mm <sup>2</sup>
effective volume	$V_e$	2000	mm <sup>3</sup>

Electrical Specification

Grade	$A_L$	Tolerance on $A_L$ (%)	Gap Length (mm)	Eff. Permeability	Part No.
P11	4650	+30/-20	-	≈1837	29-550-41