


Dimensions

Symbol	Value (mm)
'A'	9.00-9.30
'B'	5.20-5.40
'C'	7.50-7.75
'D'	3.70-3.90
'E'	2.00-2.10
'F'	3.60-3.90
'G'	5.50-5.80
'H'	2.10-2.40

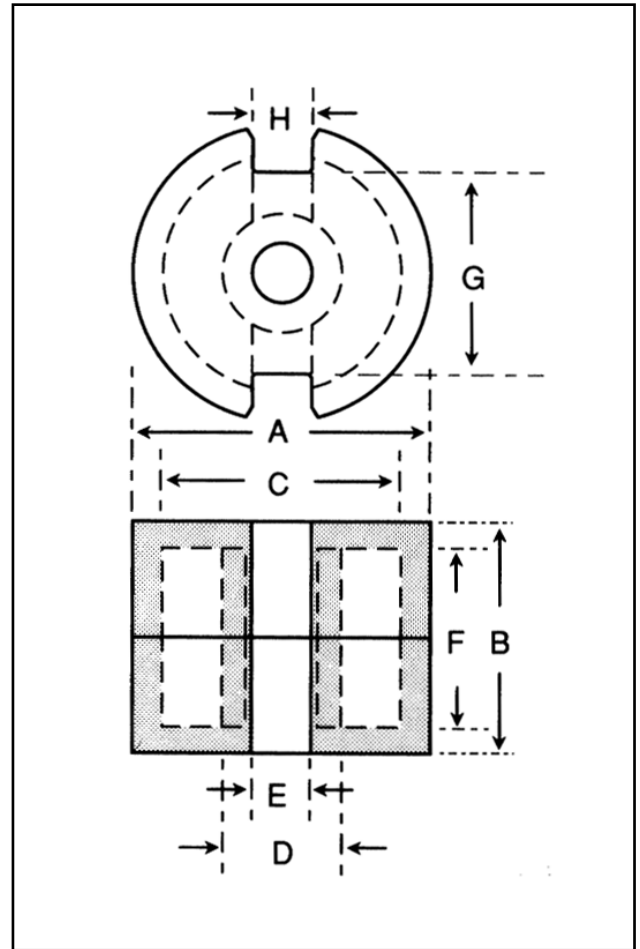

Effective Geometric Parameters

Parameter	Symbol	Value	Unit
$\Sigma(l/A)$	C_1	1.25	mm^{-1}
effective magnetic path length	l_e	12.50	mm
effective area of magnetic path	A_e	10.00	mm^2
effective volume	V_e	125	mm^3

Electrical Specification

Grade	A_L	Tolerance on A_L (%)	Gap Length (mm)	Eff. Permeability	Part No.
P12	160	$\pm 5\%$	0.07	≈ 159	29-351-42*

*Part number refers to a pair of cores

