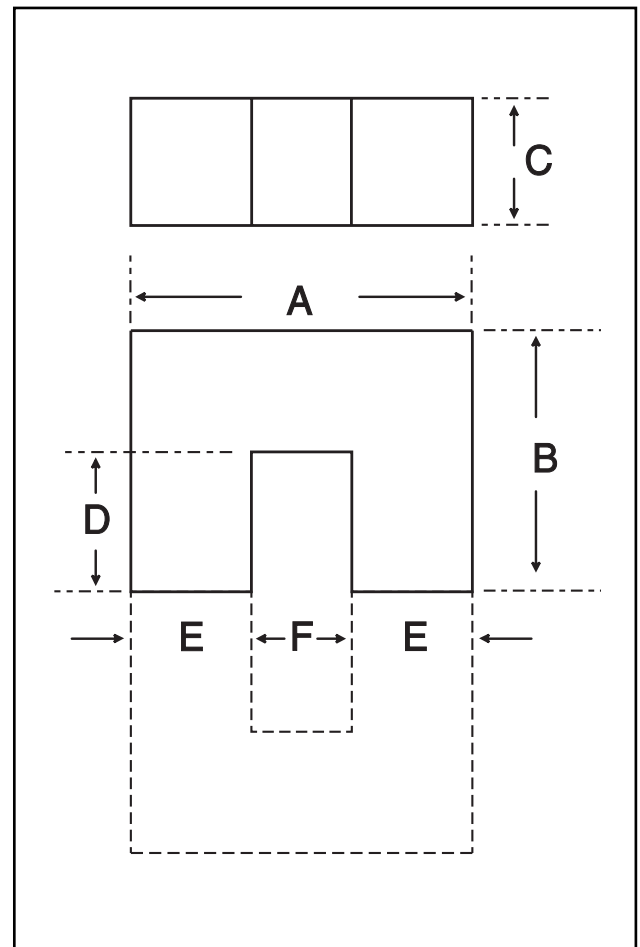


Dimensions

Symbol	Value (mm)
'A'	14.60-15.90
'B'	10.70-11.70
'C'	6.00
'D'	5.75-6.25
'E'	4.80 min
'F'	5.00-5.40

Effective Geometric Parameters

Parameter	Symbol	Value	Unit
$\Sigma(l/A)$	C_1	1.673	mm^{-1}
effective magnetic path length	l_e	50.24	mm
effective area of magnetic path	A_e	30.02	mm^2
minimum area of magnetic path	A_{\min}	-	mm^2
effective volume	V_e	1639	mm^3

Electrical Specification

Grade	A_L Value	Tolerance on A_L (%)	Gap Length (mm)	Eff. Permeability	Part No.
F44	1200	+30/-20	-	≈ 1500	34-011-44