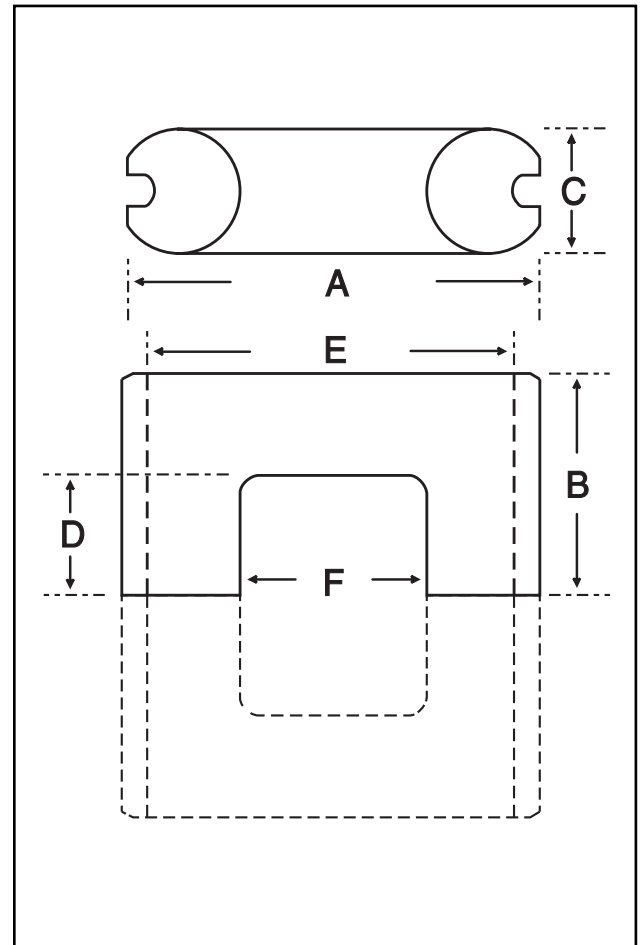


Dimensions

Symbol	Value (mm)
'A'	53.90 max
'B'	27.30-27.70
'C'	10.90-11.40
'D'	17.10-17.90
'E'	45.30-46.90
'F'	29.50 min

Effective Geometric Parameters

Parameter	Symbol	Value	Unit
$\Sigma(l/A)$	C_1	1.74	mm^{-1}
effective magnetic path length	l_e	162.00	mm
effective area of magnetic path	A_e	93.00	mm^2
minimum area of magnetic path	A_{\min}	-	mm^2
effective volume	V_e	15100	mm^3

Electrical Specification

Grade	A_L Value	Tolerance on A_L (%)	Gap Length (mm)	Eff. Permeability	Part No.
F44	1400	+30/-20	-	≈ 1700	34-514-44