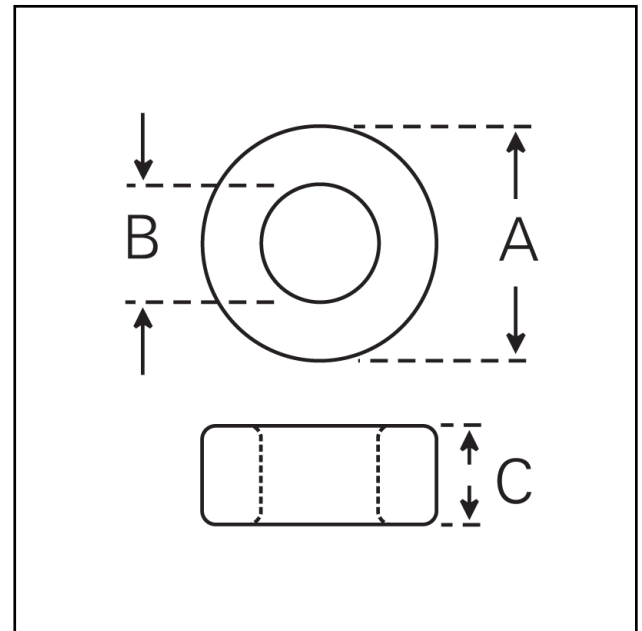


Dimensions

Symbol	Value (mm)	±
'A'	63.00	2.00
'B'	38.00	1.20
'C'	25.00	0.80

Effective Geometric Parameters

Parameter	Symbol	Value	Unit
$\Sigma(l/A)$	C_1	0.497	mm^{-1}
effective magnetic path length	l_e	152.08	mm
effective area of magnetic path	A_e	305.92	mm^2
effective volume	V_e	46528	mm^3

Electrical Specification

Grade	A_L	Tolerance on A_L (%)	Coating	μ_i	Part No.
F16	316	+30/-20	No Coating	≈125	28-061-32
F5	5055	+30/-20	No Coating	≈2000	28-061-25
F48	5814	+30/-20	No Coating	≈2300	28-061-48
F9	11100	+30/-20	No Coating	≈4400	28-061-36
F9C	12638	+30/-20	Epoxy	≈5000	28-761-36C
F10	15170	+30/-20	Epoxy triple coated	≈6000	28-761-37P

Please note all dimensions are nominal and given for uncoated cores.

Coating Characteristics

Dielectric breakdown strength and approximate thickness per surface for coated cores is as follows:

Epoxy 1000V dc for cores up to 10mm outside diameter
 1500V dc for cores >10mm and ≤20mm outside diameter
 2000V dc for cores >20mm outside diameter
 Coating thickness is approximately 0.25mm

Enamel Cores are coated for identification purposes only.
 They can be either fully or partially coated and no breakdown strength can be guaranteed.
 Coating thickness is approximately 0.25mm